



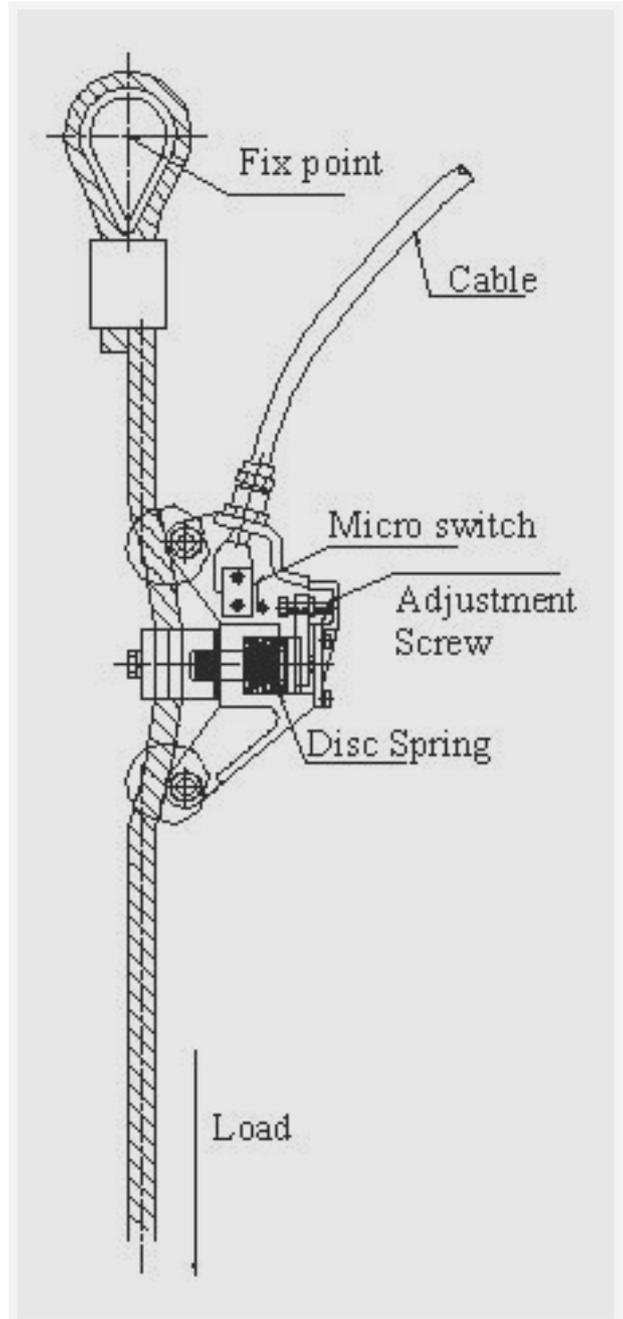

**Prevents operator from lifting loads greater than the host's capacity.**

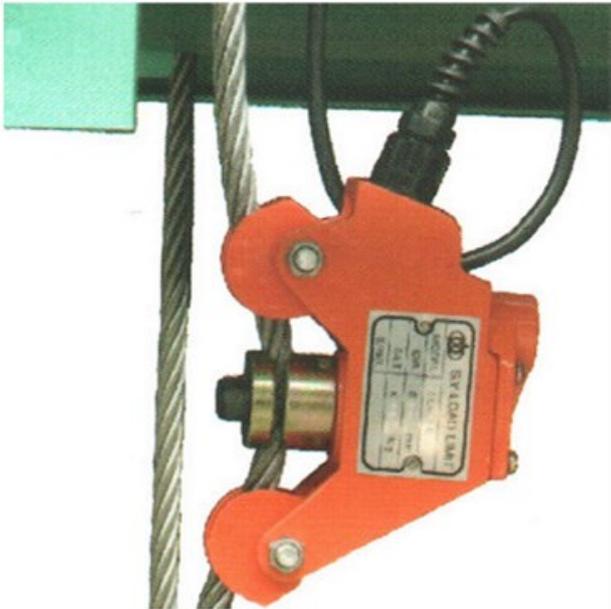

- ◆ **Cast aluminium Body** : LM4
- ◆ **Disc Springs** : To German standards DIN 2093 & 2092
- ◆ **Dimension** : A Compact load cell, when fitted does not affect the height or range of Lift.
- ◆ **Guides** : It provides a higher degree of accuracy due to the increase contact surface between the guides and the crane/hoist rope.
- ◆ **Limit Switch** : A heavy duty micro switch is fitted able to work up to a voltage 220 AC. (IP65)
- ◆ **Pre-load setting** : The overload protector can be pre-set to a given load or can be set at site to a specific load requirement.

Type	Rope Diameter (mm)
SLL-18	5 ~ 13
SLL-28	13 ~ 16
SLL-65	18 ~ 26
SLL-80	26 ~ 34