

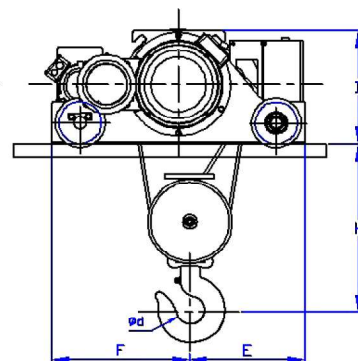
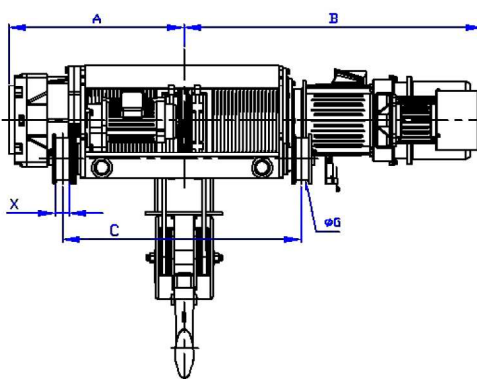
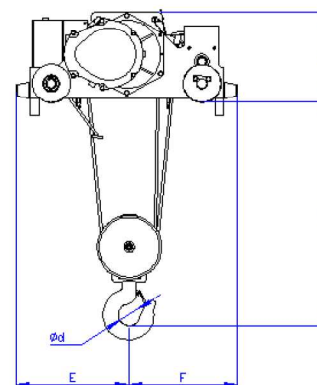


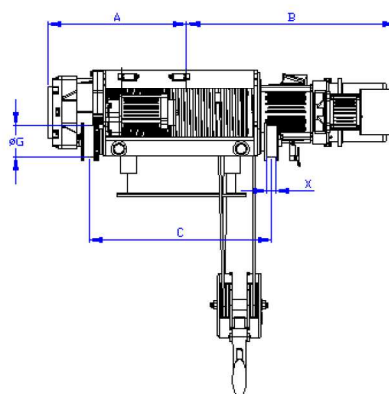

Type			2RFN-DTC		2.8RFN-DTC		3RFN-DTC		5RFN-DTC		7.5RFN-DTC		10RFN-DTC		15RFN-DTC		20RFN-DTC	
Capacity (Ton)			2		2.8		3		5		7.5		10		15		20	
Lift (M)			6 、 8 、 12															
Hoist Speed (M/min)		50HZ	6.3/1.05		5.3/0.88		5.3/0.88		6/0.6		4.2/0.42		4.3/0.43		4.2/0.42		3.5/0.35	
		60HZ	7.5/1.25		6.3/1.05		6.3/1.05		7.2/0.72		5/0.5		5.2/0.52		5/0.5		4.2/0.42	
Hoist Motor (Kw)			3.75/0.75		3.75/0.75		3.75/0.75		7.5/0.75		7.5/0.75		11/1.5		15/1.5		18.5/2.2	
Trolley Speed (M/min)		50HZ	14/4.6										15/5		12/4			
		60HZ	17/5.6										18/6		15/5			
Trolley Motor (Kw)			0.4/0.13		0.4/0.13		0.4/0.13		0.75/0.25		0.75/0.25		1.5/0.5		1.5/0.5		2.2/0.75	
Hoisting Speed Ratio			6 : 1								10 : 1							
Dia. Of Rope (mm)			Φ10		Φ8		Φ12		Φ10		Φ12		Φ10		Φ16		Φ12	
Reeving Type			2/1		4/2		2/1		4/2		2/1		4/2		4/2		4/2	
Approximate Dimensions (unit : mm)			A	6M	325	425	455	530	455	530	490	570	625	725	800	820		
				8M	345	485	455	580	455	580	490	625	675	775	855	880		
				12M	400	*	530	710	530	710	570	725	805	915	980	1030		
			B	6M	955	1010	980	1050	980	1050	1050	1110	1165	1215	1300	1320		
				8M	975	1035	980	1100	980	1100	1050	1165	1215	1265	1355	1390		
				12M	1150	*	1050	1230	1050	1230	1110	1265	1350	1405	1470	1520		
			C	6M	550	750	600	750	600	750	600	750	850	900	850	950		
				8M	600	850	600	850	600	850	600	850	1000	1000	950	1050		
				12M	700	*	750	1100	750	1100	750	1050	1250	1250	1150	1250		
			D		380	380	415	415	415	415	480	480	500	550	680	680		
			E		350		380		380		440		430	490	575	575		
			F		400		430		430		460		500	610	715	715		
			ΦG		120		120		120		150		180	200	220	250		
			H		650	580	650	580	650	580	750	670	720	830	920	1050		
			Φd		40		60		60		75		85	100	120	140		
			X		44		44		44		44		52	52	58	58		
Net Weight (Kg)			6M	240	280	380	430	380	430	545	580	700	880	1300	1500			
			8M	250	300	380	450	380	450	560	620	760	980	1350	1580			
			12M	262	*	410	490	410	490	580	680	810	1170	1490	1710			

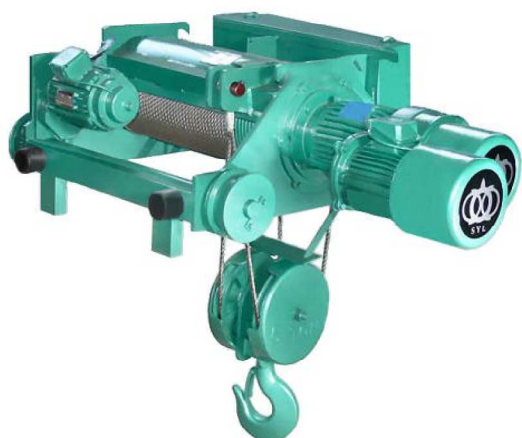

Type			5RSN-DTC	10RSN-DTC	15RSN-DTC	20RSN-DTC	30RSN-DTC
Capacity (Ton)			5	10	15	20	30
Lift (M)			6 、 8 、 12				
Hoist Speed (M/min)	50HZ		3/0.5	3/0.3	3/0.3	2.3/0.23	2.1/0.21
	60HZ		3.6/0.66	3.6/0.36	3.6/0.36	2.8/0.28	2.5/0.25
Hoist Motor (Kw)			3.75/0.75	7.5/0.75	11/1.5	11/1.5	18.5/2.2
Trolley Speed (M/min)	50HZ		14/4.6	15/5	12/4		
	60HZ		17/5.6	18/6	15/5		
Trolley Motor (Kw)			0.75/0.25	1.5/0.5	1.5/0.5	2.2/0.75	2.2/0.75
Hoisting Speed Ratio			6 : 1		10 : 1		
Dia. Of Rope (mm)			Φ12	Φ16	Φ18	Φ20	Φ25
Reeving Type			4/1				
Approximate Dimensions (unit : mm)	A	6M	530	625	750	780	910
		8M	580	675	825	855	985
	B	6M	1050	1115	1240	1270	1410
		8M	1130	1165	1315	1340	1485
	C	6M	750	900	950	1000	1100
		8M	850	1000	1100	1150	1250
	D		450	500	580	580	700
	E		430	450	625	650	850
	F		470	550	610	610	650
	ΦG		150	200	220	250	285
	H		700	900	1000	1050	1150
	Φd		75	100	120	140	140
	X		44	52	58	58	75
Net Weight (Kg)	6M		430	800	1250	1300	1900
	8M		470	890	1320	1500	2200