


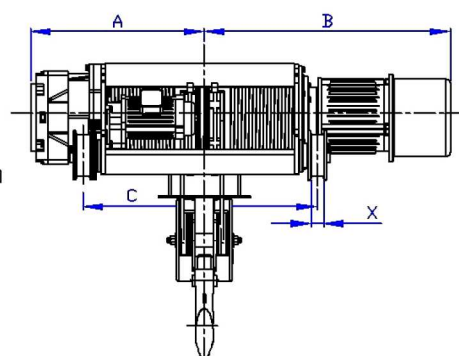
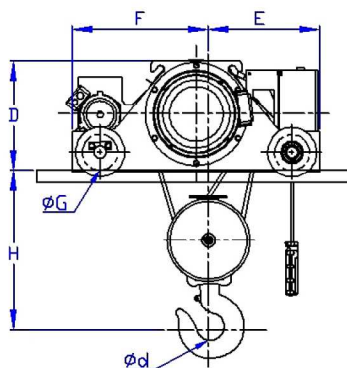


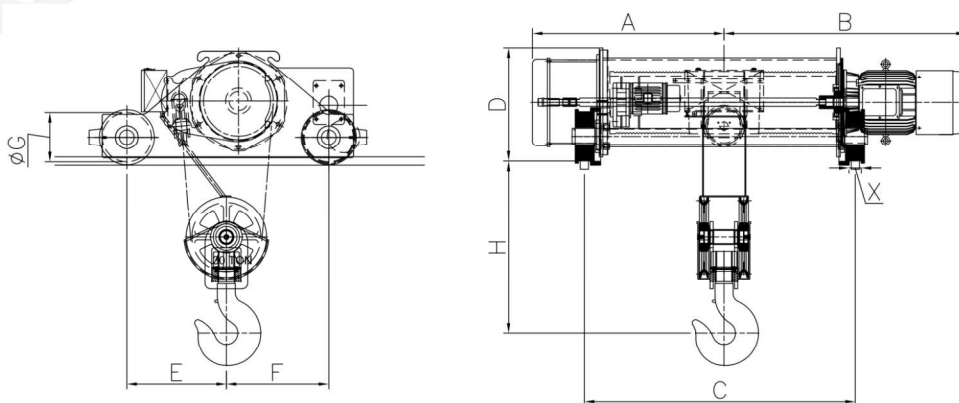

Type			2.8RF-DT		3RF-DT		5RE-DT	5RF-DT		7.5RF-DT	10RF-DT	
Capacity (Ton)			2.8		3		5			7.5	10	
Lift (M)			6 、 8 、 12									
Hoist Speed (M/min)	50HZ		5.3		5.3		4.4	6		4.2	4.3	
	60HZ		6.3		6.3		5.3	7.2		5	5.2	
Hoist Motor (Kw)			3.75		3.75		5.5	7.5		7.5	11	
Trolley Speed (M/min)	50HZ		14									15
	60HZ		17									18
Trolley Motor (Kw)			0.37		0.37		0.75			0.75	1.5	
Dia. Of Rope (mm)			Φ12	Φ10	Φ12	Φ10	Φ10	Φ16	Φ12	Φ14	Φ16	
Reeving Type			2/1	4/2	2/1	4/2	4/2	2/1	4/2	4/2		
Approximate Dimensions (mm)	A	6M	455	530	455	530	570	490	570	625	725	
		8M	455	580	455	580	625	490	625	675	775	
		12M	530	710	530	710	725	570	725	805	910	
	B	6M	625	700	705	780	870	790	870	930	1020	
		8M	625	700	705	830	930	790	930	980	1070	
		12M	700	880	780	960	1030	870	1030	1105	1205	
	C	6M	600	750	600	750	750	600	750	850	900	
		8M	600	850	600	850	850	600	850	950	1000	
		12M	750	1100	750	1100	1050	750	1050	1250	1250	
	D		415		415		480		500	550		
	E		380		380		440		430	490		
	F		430		430		460		500	610		
	ΦG		120		120		150		180	200		
	H		630		630		750		720	830		
	Φd		60		60		75		85	100		
	X		44		44		44		52	52		
Net Weight (Kg)	6M		300	330	330	330	520	480	520	650	850	
	8M		310	350	310	350	560	490	560	700	900	
	12M		330	380	330	380	620	520	620	800	1000	

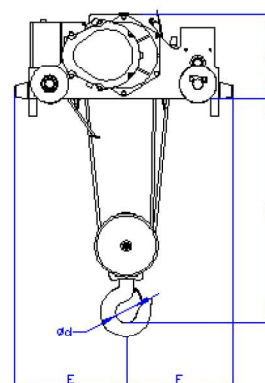

Type			15RF-DT	20RF-DT	25RF-DT	30RF-DT	
Capacity (Ton)			15	20	25	30	
Lift (M)					9 、 12	9 、 12	12
Hoist Speed (M/min)	50HZ		4.2	3.5	3	3.1	2.3
	60HZ		5	4.2	3.6	3.7	2.8
Hoist Motor (Kw)			15	18.5	18.5	22.5	22.5
Trolley Speed (M/min)	50HZ		12				
	60HZ		15				
Trolley Motor (Kw)			1.5	2.2	2.2	2.2	1.1 x 2
Dia. Of Rope (mm)			Φ18	Φ20	Φ22	Φ25	Φ20
Reeving Type			4/2				
Approximate Dimensions (mm)	A	6M	800	820	*	*	*
		8M	855	880	(9M) 969	(9M) 969	*
		12M	980	1030	1054	1167	1038
	B	6M	1060	1090	*	*	*
		8M	1115	1140	(9M) 1329	(9M) 1279	*
		12M	1220	1290	1414	1475	1705
	C	6M	950	950	*	*	*
		8M	1050	1000	(9M) 1305	(9M) 1454	*
		12M	1250	1250	1475	1650	1780
	D		680	680	690	690	1000
	E		575	575	606	606	1130
	F		715	715	624	624	670
	ΦG		220	250	250	300	300
	H		920	1050	1044	1044	1384
	Φd		120	140	140	140	140
	X		58	58	75	75	75
Net Weight (Kg)	6M		1100	1350	*	*	*
	8M		1160	1430	*	*	*
	12M		1280	1550	*	*	*

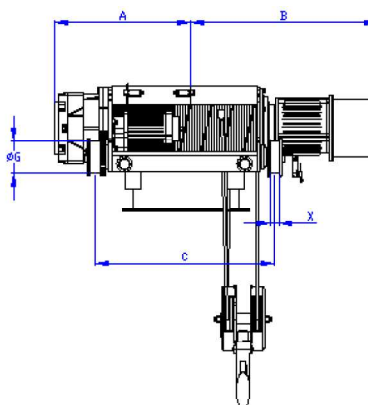

Type			2.8RS-DT	3RS-DT	5RS-DT	5RSL-DT	10RS-DT	10RS2-DT	15RS-DT	20RS-DT	30RS-DT
Capacity (Ton)			2.8	3	5	5	10	10	15	20	30
Lift (M)			6 、 8								
Hoist Speed (M/min)	50HZ		3.2	3.2	3.3	4.8	3	4.3	3	2.3	2.1
	60HZ		3.8	3.8	3.9	5.7	3.6	5.2	3.6	2.8	2.5
Hoist Motor (Kw)			2.2	2.2	3.75	5.5	7.5	11	11	11	18.5
Trolley Speed (M/min)	50HZ		14			15			12		
	60HZ		17			18			15		
Trolley Motor (Kw)			0.37	0.37	0.75	0.75	1.5	1.5	1.5	2.2	2.2
Dia. Of Rope (mm)			Φ12	Φ12	Φ12	Φ12	Φ16	Φ16	Φ18	Φ20	Φ25
Reeving Type			2/1	2/1	4/1	4/1	4/1	4/1	4/1	4/1	4/1
Approximate Dimensions (mm)	A	6M	455	455	530	530	625	*	750	780	910
		8M	480	480	580	580	675	*	825	855	985
	B	6M	630	630	780	780	925	*	1050	1080	1150
		8M	655	655	830	830	975	*	1130	1180	1225
	C	6M	600	600	750	750	900	*	950	1000	1100
		8M	650	650	850	850	1000	1200	1100	1150	1250
	D		415	415	450	450	500	431	580	580	700
	E		380	380	430	430	450	603	625	650	850
	F		430	430	470	470	550	538	610	610	650
	ΦG		120	120	150	150	200	200	220	250	285
	H		700	700	700	700	900	*	1000	1050	1150
	Φd		60	60	75	75	100	100	120	140	140
	X		44	44	44	44	52	52	58	58	75
Net Weight (Kg)	6M		280	280	370	370	710	*	1180	1500	1750
	8M		300	300	415	415	750	*	1280	1400	2000