


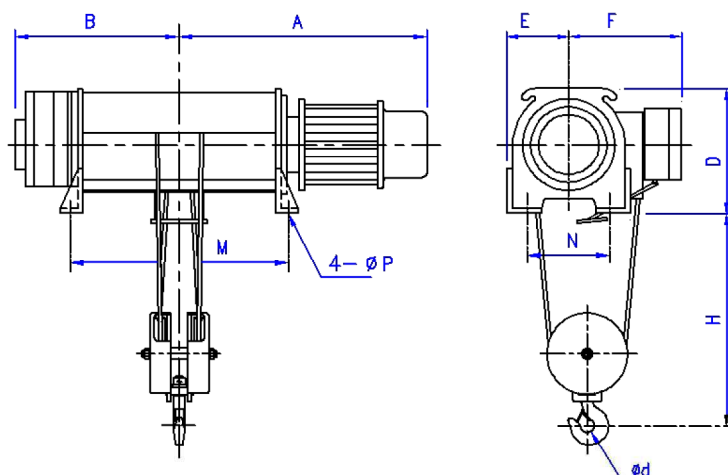

Type			1RF-D	2RF-D		2.8RF-D		3RF-D		5RF-D	
Capacity (Ton)			1	2		2.8		3		5	
Lift (M)			6 、 8 、 12								
Hoist Speed (M/min)	50HZ	7	6.3		5.3		5.3		6		
	60HZ	8.4	7.5		6.3		6.3		7.2		
Hoist Motor (Kw)			1.5	3.75		3.75		3.75		7.5	
Dia. Of Rope (mm)			Φ8	Φ10	Φ8	Φ12	Φ10	Φ12	Φ10	Φ16	Φ12
Reeving Type			2/1	2/1	4/2	2/1	4/2	2/1	4/2	2/1	4/2
Approximate Dimensions (unit : mm)	A	6M	490	570	640	590	700	670	780	790	870
		8M	560	605	700	620	750	700	830	790	930
		12M	605	675	880	700	880	780	960	870	1030
	B	6M	244	290	425	420	530	420	530	490	570
		8M	294	330	485	455	580	455	580	490	625
		12M	355	400	615	530	705	530	705	570	725
	Φd		36	40		60				75	
	D		320	340	340	385	385	385	385	455	455
	E		160	185	185	215	215	215	215	250	250
	F		320	340	320	370	340	370	340	410	410
	H		500	560	480	660	560	660	560	800	660
	M	6M	372	382	650	440	660	440	660	520	680
		8M	472	462	730	512	766	512	766	520	790
		12M	595	595	582	660	1016	660	1016	680	990
	N		200	200	200	232	232	232	232	296	296
	P		14	14	14	17	17	17	17	17	17
Net Weight (Kg)	6M		100	155	185	225	260	225	260	420	480
	8M		105	160	210	235	290	235	290	430	500
	12M		120	178	260	253	350	253	350	470	540