
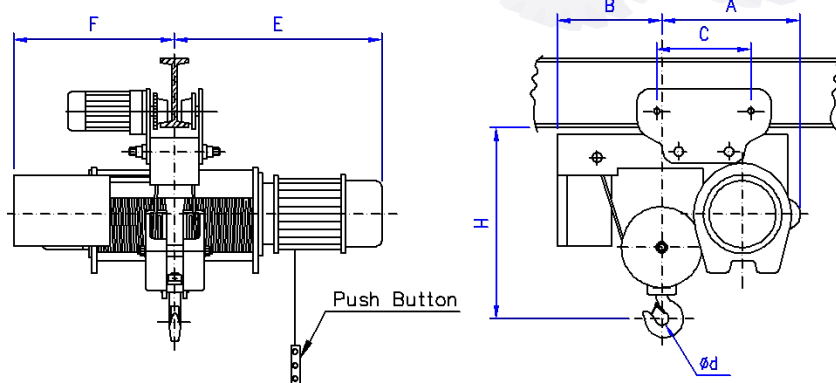


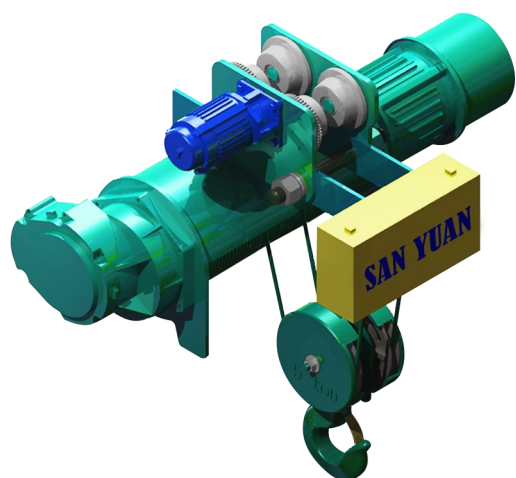

Type			1RF-LT	2RF-LT	2.8RF-LT	3RF-LT	5RF-LT	7.5RF-LT	10RF-LT
Capacity (Ton)			1	2	2.8	3	5	7.5	10
Lift (M)			6 、 8						
Hoist Speed (M/min)	50HZ		7	6.3	5.3	5.3	6	4.2	4.3
	60HZ		8.4	7.5	6.3	6.3	7.2	5	5.2
Hoist Motor (Kw)			1.5	3.7	3.7	3.7	7.5	7.5	11
Trolley Speed (M/min)	50HZ		17				14		
	60HZ		20				17		
Trolley Motor (Kw)			0.37	0.37	0.37	0.37	0.75	1.1	1.5
Dia. Of Rope (mm)			Φ6	Φ8	Φ10	Φ10	Φ12	Φ14	Φ16
Reeving Type			4/2						
Approximate Dimensions (mm)	E	6M	595	655	780	780	870	920	995
		8M	635	700	830	830	920	970	1045
	F	6M	345	400	530	530	560	610	725
		8M	385	445	580	580	610	660	775
	C		300	360	360	360	420	420	420
	Φd		37	40	60	60	75	85	100
	A		370	420	530	530	620	635	770
	B		200	250	340	340	340	380	425
	H		550	670	750	850	850	950	1100
Suitable Beam Width			125~150				150~190	150~190	
Net Weight (Kg)	6M		130	210	275	275	490	540	820
	8M		145	230	300	300	540	590	930