


1 ~ 5 Ton

Stable structure. Easy to install.



- Driven by a hand chain, it moves freely along the lower flange of the steel profile.
- High transmission efficiency, low pulling force.
- Easy adjustment of wheel spacing.
- Flexible wheel rotation.

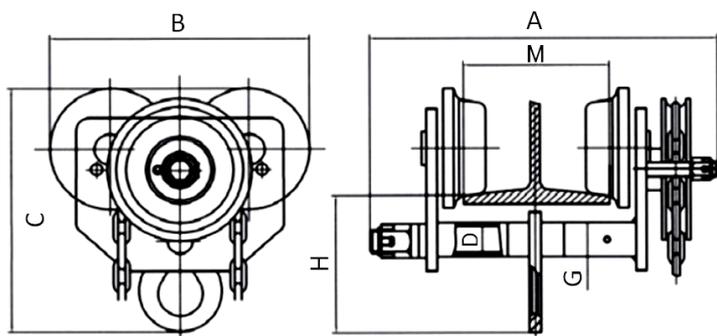

Type	GT1	GT2	GT3	GT5	
Rated Capacity (Ton)	1	2	3	5	
Chain Length	3 m				
I Beam (mm)	75~100	100~150	100~150	125~175	
Approx. Dimensions (mm)	A	225	285	305	342
	B	216	241	286	312
	C	232	273	319	377
	D	24	30	36	42
	G	40	48	56	66
	H	150	178	203	251
N.W. (kg)	12	17	29	41	

Note: The crane frame should be equipped with safety devices to prevent the crane from sliding more than 25mm in the event of wheel or axle damage.